



EMME ANTINCENDIO S.r.l.

www.emme-italia.com

23020-1

2 Kg CO₂ FIRE EXTINGUISHER



- CYLINDER
Aluminum alloy AA6061, epoxy polyestere powder painting, Red Ral 3000.
- EXTINGUISHING AGENT
Carbon Dioxide 99,99%
- VALVE
CPF M. 25x2, brass body, levers with red painting Ral 3000.
- USE
B fire rating (flammable liquids)


Note: image is for illustrative purpose only, the product purchased can has some differences

2 Kg CO₂ fire extinguisher, temperature range from -20°C to +60°C, manufactured in accordance to **UNI EN 3-7 (D.M. 7.1.2005)**, approved Marine Equipment Directive **MED 2014/90/EU**, certified according to the directive for pressure equipment PED 2014/68/EU.

Quality Product certification guaranteed by Bureau Veritas Italia.

Suitable for use on fire involving electrical voltages up to 1'000 V, at a distance of 1 mt.

APPROVED/CERTIFIED FIRE EXTINGUISHER:



FIRE RATING :



34

© REPRODUCTION IS PROHIBITED



2 Kg CO₂ FIRE EXTINGUISHER

TECHNICAL SPECIFICATIONS

FIRE RATING	34 B
EXTINGUISHING AGENT	Carbon Dioxide 99,99%
TEMPERATURE RANGE	-20°C / +60°C
NOMINAL CHARGE	2 Kg
FULL WEIGHT	~ 5,1 Kg
DIMENSIONS	Height(base-valve) 505 mm Diameter 117 mm
DISCHARGE TIME	7 sec.
VALVE TIGHTENING TORQUE	Minimum 95 Nm, Maximum 130 Nm
CYLINDER PRESSURE TEST	PT 212 bar
CYLINDER VOLUME	3 L.
SAFETY VALVE	Set at 195 +15/-23 bar
CYLINDER MATERIAL	Aluminum alloy AA6061
EXTERNAL/INTERNAL TREATMENT	Sandblast and epoxy polyester powder painting, Red Ral 3000 colour

PACKAGING

STANDARD : maximum 80 pieces for pallet
(80 pieces for box, max 1 box for pallet)
Pallet dimensions 100x120x70(h) cm

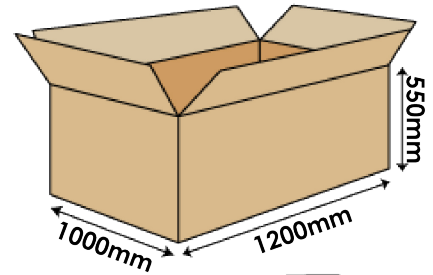


Note: the packaging quantities and measurements are indicative and can be subject at changes

SINGLE PACKAGING
ON REQUEST

MAINTENANCE AND INSTALLATION

For outdoor or marine installation is recommended to protect the fire extinguisher with cover or box. Maintenance according to the rules in use in utilization country.

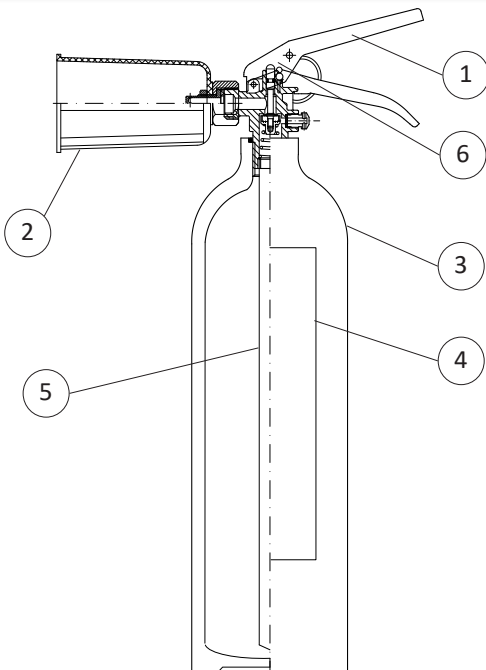

SPARE PARTS

NUMBER	DESCRIPTION	CODE
1	Valve M. 25x2	0213C-1
2	Horn	0331-1
3	Cylinder	0107
4	Label	0061
5	Aluminum dip tube	0158-1
6	Safety pin	0284
	Safety valve	0262C
	Safety pin seal	0285
OPTIONAL	Iron marine bracket red painting	1238

File name	Code	Date	Rele.	Check	Rev.	Pag.
ds_23020-1	23020-1	08/08/20	M.R	MR	2	2

EMME ANTINCENDIO S.r.l

Via del Molino, 40 - 52010 Corsalone (AR) - Italy
info@emme-italia.com - Tel. +39.0575.511320

Others Emme Antincendio s.r.l. warehouses in Italy : Milano - Padova - Reggio Emilia
PIVA/ C.F. 11208251006 - R.E.A. FI-632545